digital nameplate incl.

SCHNABEL® EINFAHRTSTORE

PROFILINE NEXO

Clear opening	6,000 mm to 16,000 mm 500 mm increments (or custom size)
Overall gate height	1,400 mm - 2,400 mm
Operating cycles per day	80
Ground clearance	150 mm
Material	Aluminium
Colour	Powder-coated
Infill bars	30 mm square bars
Digital nameplate	Technical documentation, operating instructions, foundation plan, approval drawing, digital maintenance log, wiring diagram, service cloud storage

Photocells	At 2 heights (inside and outside)
Safety contact strips	4x active stationary & 6x active moving
Programming	All parameters factory-programmed
Duty cycle	80%
Speed	22m/min
Drive	230V Getriebemotor
Control	TPS-SE20 - incl. display
Scope of delivery	Radio receiver incl. 1x 2-channel remote control, device plug for quick commissioning, industrial key switch with emergency-off / emergency-stop inside and outside in the drive portal, 2xLED warning light, mounting hardware

Optional accessories

Remote control, 2-, bzw. 4-channel
bzw. Typ SE-140.1
868 MHz

Turnkey gate system, delivery incl. foundation
or concrete angle foundation

Code keypad
with touch function glass front, aluminium housing
2 channels possible

Integrated key switch for fire brigade
profile cylinder
by customer

Cloud service
Remote maintenance,
access control, smartphone as remote control

Spiked strip
Pre-assembled
on the top edge of the gate.
Note (available from 1,800 mm gate height)

Second RAL colour
Guide post and run-in post different colour from gate leaf

Dimensional table

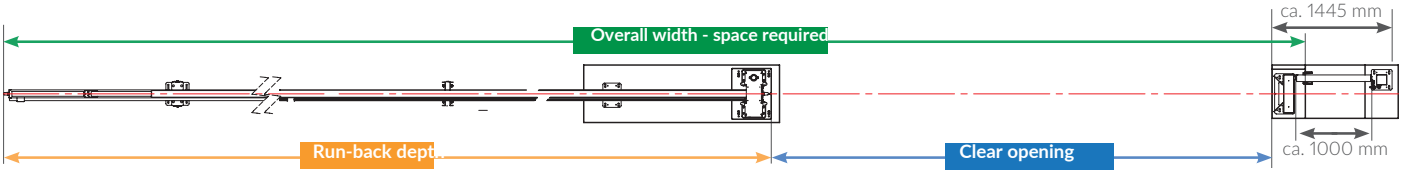

Roller profile 270		
DL	**ET**	**GP**
6.000 mm	5.260 mm	11.600 mm
6.500 mm	5.640 mm	12.480 mm
7.000 mm	6.025 mm	13.365 mm
7.500 mm	6.405 mm	14.245 mm
8.000 mm	6.790 mm	15.130 mm
8.500 mm	7.175 mm	16.015 mm
9.000 mm	7.555 mm	16.895 mm
9.500 mm	7.940 mm	17.780 mm
10.000 mm	8.320 mm	18.660 mm
10.500 mm	8.705 mm	19.545 mm
11.000 mm	9.085 mm	20.425 mm

Roller profile 270		
DL	**ET**	**GP**
11.500 mm	9.470 mm	21.310 mm
12.000 mm	9.850 mm	22.190 mm
12.500 mm	10.235 mm	23.075 mm
13.000 mm	10.615 mm	23.955 mm
13.500 mm	11.000 mm	24.840 mm
14.000 mm	11.380 mm	25.720 mm
14.500 mm	11.760 mm	26.600 mm
15.000 mm	12.145 mm	27.485 mm
15.500 mm	12.525 mm	28.365 mm
16.000 mm	12.910 mm	29.250 mm

D = actual clear opening
E = run-back depth = front edge of drive foundation to rear edge of gate when open
G = overall space required = rear edge of run-in foundation to rear edge of gate when open

Schnabel Einfahrtstore GmbH & Co. KG | Äußerer Westring 4 | 91717 Wassertrüdingen
info@schnabel-einfahrtstore.de | Tel.: (09832) 704 87 - 0 | www.schnabel-einfahrtstore.de