SCHNABEL EINFAHRTSTORE

# PRODUCT LINE

## Sliding gate

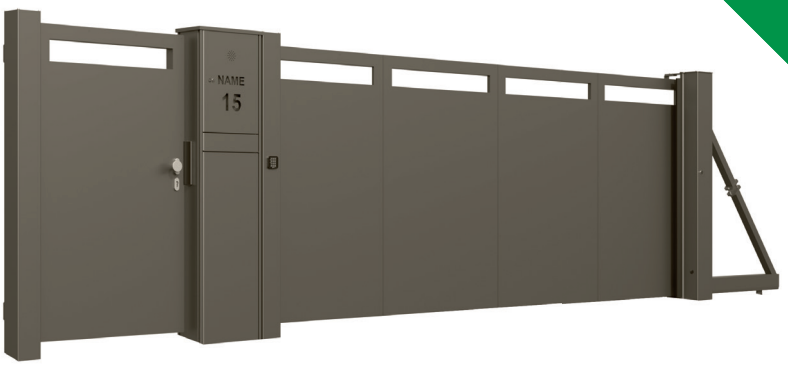


digitales Typenschild

inkl. Handsender

| | |
|---|---|
| **Clear opening** | 3,000 to 6,000 mm,<br>500 mm increments or custom size |
| **Overall gate height** | 1,200 mm - 2,000 mm |
| **Operating cycles per day** | 100 |
| **Ground clearance** | 100 mm |
| **Material** | Aluminium |
| **Colour** | Powder-coated |
| **Design** | As selected |
| **Digital nameplate** | Technical documentation, operating instructions, foundation plan, approval drawing, digital maintenance log, wiring diagram, service cloud storage |

| | |
|---|---|
| **Photocells** | At 2 heights (inside and outside) |
| **Safety contact strips** | 2x aktive feststehende & 2x passive mitfahrende |
| **Programming** | All parameters factory-programmed |
| **Duty cycle** | 100% |
| **Speed** | 13,5m/min (22,5cm/sec) |
| **Drive** | Digital, innovative brushless motor |
| **Control** | SE B70, incl. fault display |
| **Scope of delivery** | Radio receiver incl. 2-channel remote control, device plug for quick commissioning, industrial key switch with emergency-off / emergency-stop inside and outside in the drive portal, LED warning light, mounting hardware |

## Optional accessories

**Remote control, 2 channels**
120.1)
868 MHz

**Remote control, 4 channels**
140.1)
868 MHz

**Remote control, 3 channels**
stylish, round design, LED
.1)

**Wireless wall button**
stylish, round design, LED
130.1)

**Cloud service**
Remote maintenance,
access control, smartphone as remote control

Turnkey gate system, delivery incl. foundation
or concrete angle foundation

**Code keypad**
with touch function glass front, aluminium housing
2 channels possible

**Code keypad "WIRELESS"**
Stylish glass front. Touch function.
supplied loose as accessory

**Key switch**
Key switch installed in the run-in post

**GSM module** Fully
integrated into the gate system. Incl.
power supply. User can open the gate via a free phone call.

**Door closer**
as standard)
Closing force and Speed adjustable

**Credit for radio equipment**
Credit for customer-supplied radio - output terminals installed - item not discountable

## Dimensional table

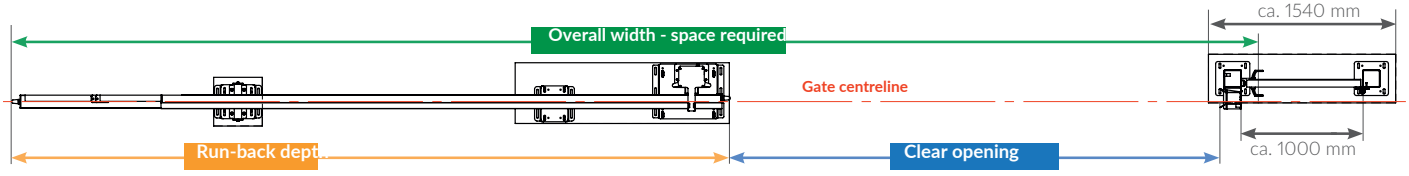


| DL | ET | GP |
|---|---|---|
| 3.000 mm | 4.600 mm | 7.900 mm |
| 3.500 mm | 5.260 mm | 9.100 mm |
| 4.000 mm | 5.910 mm | 10.250 mm |
| 4.500 mm | 6.560 mm | 11.400 mm |

| DL | ET | GP |
|---|---|---|
| 5.000 mm | 7.210 mm | 12.550 mm |
| 5.500 mm | 7.860 mm | 13.700 mm |
| 6.000 mm | 8.510 mm | 14.850 mm |

D = actual clear opening
E = run-back depth = front edge of drive foundation to rear edge of gate when open
G = overall space required = rear edge of run-in foundation to rear edge of gate when open


MADE IN BAVARIA Qualität aus Bayern

Schnabel Einfahrtstore GmbH & Co. KG | Äußerer Westring 4 | 91717 Wassertrüdingen
info@schnabel-einfahrtstore.de | Tel.: (09832) 704 87 - 0 | www.schnabel-einfahrtstore.de



MW 03.26